



Adirondack Glider Additional Assembly Instructions



Unpack and examine all additional parts, which consist of:


- 1 each: Glider base frame with swing arms
- 2 each: Adirondack base leg supports
- 1 each: Additional hardware
- 1 each: Assembly instructions

NOTE: BOTH BASE LEG SUPPORTS ARE LABELLED FOR CORRECT ALIGNMENT.

1. Turn assembled Adirondack upside down on a flat table top as shown.



2. Attach base leg supports to front and base legs. Insert two 1³/₄" screws through front (square end) of one base leg support until tips show. Also insert one 1³/₄" screw and one 3" screw through back of base leg support as shown in the photo until the tip of the 1³/₄" screw shows. Apply glue and line up screws to pre-drilled holes on inside of front leg and bottom of base leg. Tighten screws. Repeat for second base leg support on other side.

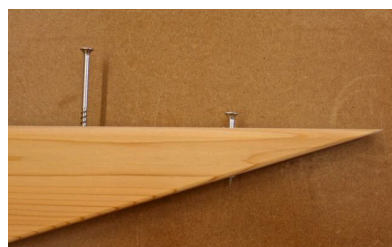




3. Bolt Adirondack Chair to glider arms of Glider Frame. Turn Adirondack the right way up and place it over the glider frame with the 'FairCape' nameplate facing the front of the chair. Insert a 3" bolt through the hole in the front leg and the glider arm in the following order: 3" bolt, washer, front leg, base leg support, washer, glider arm, locknut. Use two wrenches to tighten.



Use 2" bolts through the holes in the back of the base legs in the following order: 2" bolt, washer, base leg, washer, glider arm, locknut. Tighten.

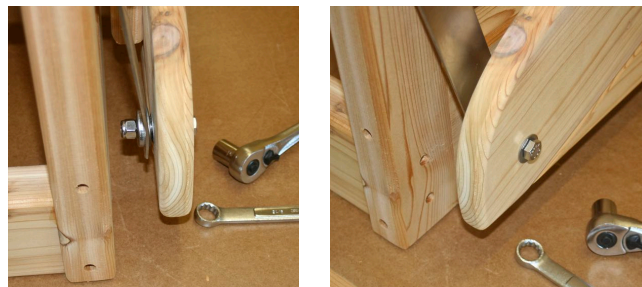

Move the chair with two people picking up the base frame.

Enjoy!